



IT

Vetrina Refrigerata Ventilata

Innovativo sistema di alzata vetri brevettato | fianchi laterali riscaldati | cappello lato operatore scorrevole con arresto soft closing e ribaltina ad aggancio magnetico cappello lato cliente apribile verso l'alto | micro-plafoniere LED frontale e laterali | profili in alluminio brillante | vasca coibentata con poliuretano ecologico e rivestita in acciaio inox | refrigerazione ventilata con sistema a capillare (valvola termostatica per motore esterno) | centralina elettronica e lettore digitale della temperatura a filo piano | vassoi espositivi e pianetto perimetrale in acciaio lucido | piano di lavoro in acciaio lucido | telaio portante in acciaio zincato con piedini inox regolabili in altezza | vano tecnico e vano a giorno in acciaio inox lucido

EN

Ventilated Refrigerated Showcase

Innovative patented glass opening system | heated glass sides | sliding glass top on operator side with soft closing system and folding glass opening with magnetic clamps | glass top on customer side with upward opening | front and side LED light fixture | bright aluminum profiles | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with capillary system (thermostatic valve for external compressor) | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished


FR

Vitrine Réfrigérée Ventilée

Système innovant et breveté d'ouverture du vitrage | côtés vitrés chauffants | partie supérieure coulissante à côté opérateur avec système de fermeture douce et tablette vitrée avec fixation magnétique | côté client et ouverture vers le haut | micro-plafonniers avec éclairage LED sur l'avant et sur les côtés | profils aluminium brillant | cuve isolée avec du polyuréthane écologique et revêtue en acier inoxydable | réfrigération ventilée avec système capillaire (vanne thermostatique pour groupe distant) | commande numérique et afficheur de température encastré dans le plan | plateaux d'exposition et plan périmétral en acier poli | plan de travail en acier poli | châssis en acier galvanisé avec pieds en acier inoxydable réglables en hauteur | compartiment technique et compartiment ouvert en acier inoxydable poli

+2°C / +8°C



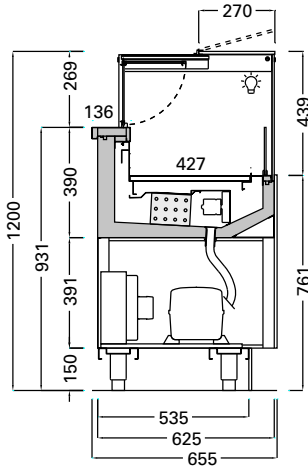

Technical



- Ventilated
- R290 ECO Friendly
- Hermetic
- LED no-spot 3000°K
- Automatic
- N. 4 / H.R. 55%
30 °C (86 °F)
- 230 V / 1 Ph / 50 Hz
- +2°C / +8°C

Data Sheet (built-in compressor)

	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion W / °C	GAS Type
	SQ6G1RV090I 	900x655x1200H 1080x835x1490H	90 65	450 / 2.9	0.25	370 / -10	R290
	SQ6G1RV100I 	1000x655x1200H 1180x835x1490H	90 75	500 / 3.0	0.3	370 / -10	R290
	SQ6G1RV130I 	1300x655x1200H 1480x835x1490H	100 90	550 / 3.2	0.3	480 / -10	R290
	SQ6G1RV150I 	1500x655x1200H 1680x835x1490H	100 105	550 / 3.2	0.3	480 / -10	R290
	SQ6G1RV170I 	1700x655x1200H 1880x835x1490H	120 115	620 / 3.5	0.35	600 / -10	R290
	SQ6G1RV200I 	2000x655x1200H 2180x835x1490H	130 135	700 / 3.9	0.4	730 / -10	R290
	SQ6G1RV210I 	2100x655x1200H 2280x835x1490H	130 145	700 / 3.9	0.4	730 / -10	R290

Options:

- intermediate
fix shelf
- LED lighting
for shelf
- heated front
- L-shaped doors
- chocolate
- lift-up
- condensation
water pan
- kit of casters
- whide system